



安装面板尺寸  
PANEL CUT-OUT

### Specification

- 1) Rating current: min. 3A, max. 20A
- 2) Working voltage: min. 12V, max. 250V
- 3) Double usage of DC and AC
- 4) Application: household appliance and electrical motor
- 5) Current: 3A, 5A, 6A, 7A, 8A, 10A, 13A, 15A, 16A, 20A
- 6) Insulated resistance:  $\geq 100M\Omega$
- 7) Dielectric strength:  $\geq 1500VAC/1min$
- 8) Electrical Life:  $\geq 10,000$  Time

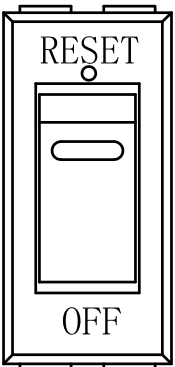

Technique characteristic: the test temperature (20°-25°), the reference curve as followed

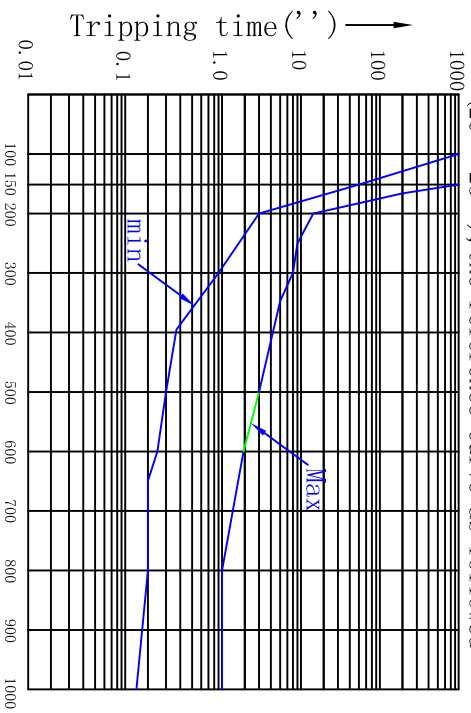

The experiment of short-circuit. ambient temperature: 25°

Rating current	current overload rating current	PCT	Tripping time
105%			Hour no tripping
150%			Hour tripping
200%			7.0-80''
300%			0.8-15''
400%			0.35-5''
500%			0.3-2.8''
600%			0.25-2''
800%			0.2-1''
1000%			0.15-0.8''

版本		更改描述	
产品系列: ST-003S		产品料号: ST-003S	
Rocken switch		制图: 审核: 核准:	
图例比例: 1:1.5	日期: 2013.11.6	日期: 2013.11.6	日期: 2013.11.6
若没有特别标示, 公差依照以下要求: X. = ±0.5 .X = ±0.30 .X = ±0.15			
		(第一视角法)	



乐清市戴尔电子有限公司  
YUEQING DAIER ELECTRON CO., LTD